

FS808

STO - ANCHOR SLING


FALL SAFE® FS808 is a 20mm heat and cut resistant Dyneema® tape sling with high abrasion resistance. Sewing is performed automatically on polyester thread.



TECHNICAL INFORMATION


LIFESPAN	10
MAXIMUM LOAD	CE - N/A
INSPECTION	Yearly
TRACEABILITY	S/N QR Code
STANDARDS	CE - EN795:2013
INTRASTAT	63079098

PRODUCT PHOTOS



SPECIFICATIONS

MATERIAL	Dyneema® and polyester
CLASS	B
MAX STRENGTH	22kN
MAX USERS NO.	1
WEIGHT PER SIZE EAN/UPC PER SIZE	FS808-0.2M - 0.10kg - 5605423753868 FS808-0.3M - 0.03kg - 5605423814729 FS808-0.6M - 0.03kg - 5605423753813 FS808-0.8M - 0.08kg - 5605423753837 FS808-1.20M - 0.09kg - 5605423753820 FS808-1.50M - 0.10kg - 5605423753844 FS808-1.5M-103 - 0.10kg - 5605423812381 FS808-1M - 0.09kg - 5605423800524 FS808-2M - 0.12kg - 5605423805420

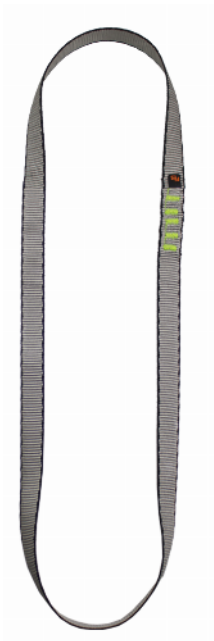

FS808

STO - ANCHOR SLING


Le ruban FALL SAFE® FS808 est un ruban Dyneema® de 20 mm de large, résistant à la chaleur et aux coupures, et offrant une haute résistance à l'abrasion. La couture est réalisée automatiquement avec un fil en polyester.



INFORMATIONS TECHNIQUES


DURÉE DE VIE	10
CHARGE MAXIMALE	CE - N/A
INSPECTION	Yearly
TRAÇABILITÉ	S/N QR Code
NORMES	CE - EN795:2013
INTRASTAT	63079098

PHOTOS PRODUIT



SPÉCIFICATIONS

MATÉRIAU	Dyneema® et polyester
CLASSE	B
RÉSISTANCE MAXIMALE	22kN
NOMBRE MAXIMAL D'UTILISATEURS	1
WEIGHT PER SIZE EAN/UPC PER SIZE	FS808-0.2M - 0.10kg - 5605423753868 FS808-0.3M - 0.03kg - 5605423814729 FS808-0.6M - 0.03kg - 5605423753813 FS808-0.8M - 0.08kg - 5605423753837 FS808-1.20M - 0.09kg - 5605423753820 FS808-1.50M - 0.10kg - 5605423753844 FS808-1.5M-103 - 0.10kg - 5605423812381 FS808-1M - 0.09kg - 5605423800524 FS808-2M - 0.12kg - 5605423805420

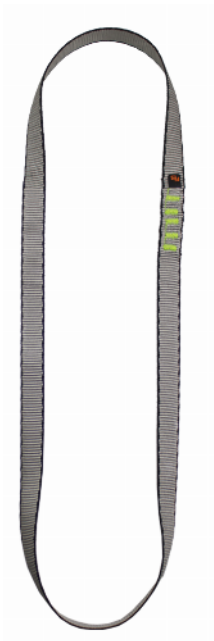

FS808

STO - ANCHOR SLING


FALL SAFE® FS808 es una cinta Dyneema® de 20 mm resistente al calor y a los cortes, con alta resistencia a la abrasión. La costura se realiza automáticamente con hilo de poliéster.



TECHNICAL INFORMATION


LIFESPAN	10
MAXIMUM LOAD	CE - N/A
INSPECTION	Yearly
TRACEABILITY	S/N QR Code
STANDARDS	CE - EN795:2013
INTRASTAT	63079098

PRODUCT PHOTOS



SPECIFICATIONS

MATERIAL	Dyneema® y poliéster
CLASS	B
MAX STRENGTH	22kN
MAX USERS NO.	1
WEIGHT PER SIZE EAN/UPC PER SIZE	FS808-0.2M - 0.10kg - 5605423753868 FS808-0.3M - 0.03kg - 5605423814729 FS808-0.6M - 0.03kg - 5605423753813 FS808-0.8M - 0.08kg - 5605423753837 FS808-1.20M - 0.09kg - 5605423753820 FS808-1.50M - 0.10kg - 5605423753844 FS808-1.5M-103 - 0.10kg - 5605423812381 FS808-1M - 0.09kg - 5605423800524 FS808-2M - 0.12kg - 5605423805420

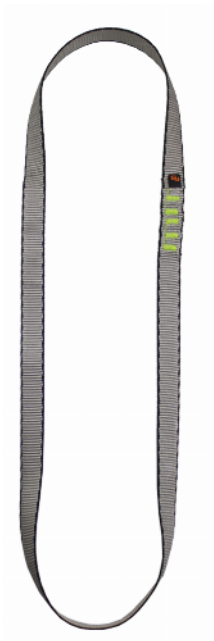

FS808

STO - ANCHOR SLING


FALL SAFE® FS808 é um estropo em fita Dyneema® resistente ao corte e calor de 20mm com alta resistência à abrasão. A costura é realizada automaticamente em linha em poliéster.



Informação Técnica

TEMPO DE VIDA ÚTIL	10
CARGA MÁXIMA	CE - N/A
INSPEÇÃO	Yearly
RASTREABILIDADE	S/N QR Code
NORMAS	CE - EN795:2013
INTRASTAT	63079098

Imagens do Produto



ESPECIFICAÇÕES

MATERIAL	Dyneema® e poliéster
CLASSE	B
FORÇA MÁX	22kN
Nº MÁX UTILIZADORES	1

WEIGHT PER SIZE EAN/UPC PER SIZE

FS808-0.2M - 0.10kg - 5605423753868
FS808-0.3M - 0.03kg - 5605423814729
FS808-0.6M - 0.03kg - 5605423753813
FS808-0.8M - 0.08kg - 5605423753837
FS808-1.20M - 0.09kg - 5605423753820
FS808-1.50M - 0.10kg - 5605423753844
FS808-1.5M-103 - 0.10kg - 5605423812381
FS808-1M - 0.09kg - 5605423800524
FS808-2M - 0.12kg - 5605423805420