



FS240

FLASH HARNESS


The FLASH is a multipurpose full body harness that can be used in a wide variety of work areas from rope access, rescue, construction, wind turbines to riggers or wooden poles. This equipment has an aluminum d-ring on the back (A - EN361) and two front loops (1/2 A + 1/2 A - EN361). It has two loops for positioning on the belt (EN358) and two front loops in the ventral area for rope access (EN813). This harness has 8 adjustment points for a perfect fit and the location of the buckles allows it to be opened fully and easily dressed like a jacket. The harness is identified with RFID tag, S/N tag and QR code for easy tracking and control.



TECHNICAL INFORMATION

| | |
|--------------|---|
| LIFESPAN | 10 |
| MAXIMUM LOAD | CE - 140kg |
| INSPECTION | Yearly |
| TRACEABILITY | S/N RFID QR Code |
| STANDARDS | CE - EN361:2002 CE - EN358:2018 CE - EN813:2024 |
| INTRASTAT | 63079098 |

PRODUCT PHOTOS

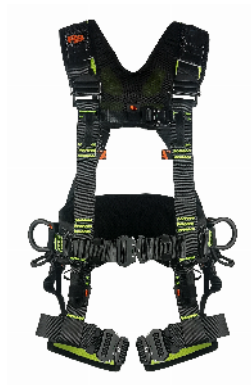

SPECIFICATIONS

| | |
|----------------------------------|---|
| METAL PARTS | Aluminium, steel |
| TEXTILE PARTS | Polyester |
| OTHER COMPONENTS MATERIAL | PA6, silicone |
| WEBBING TYPE | PES 45mm water-repellent |
| D-RINGS | ALU D-ring at back and sides, webbing loops at front |
| ANCHOR POINTS (A) | 4 |
| SHOULDER PADDING | Yes - Croc Smooth Padding 3.0 |
| LUMBAR PADDING | Yes - Croc Smooth Padding 3.0 |
| LEG PADDING | Yes |
| PADDING MATERIAL | TPU, EVA, PA, high visibility mesh and fabric PES |
| SEAT CONNECTION POINT | No |
| TOOL HOLDERS | 5 |
| TOOL HOLDERS MAX LOAD | 15kg |
| ADJUSTMENT POINTS | 8 |
| BUCKLES | 4 ALU IZY quick connect buckles; 2 aluminium spring buckles; 2 ST bar buckles |
| FALL ARREST INDICATORS | Yes |
| LANYARD KEEPERS | Yes |
| COMPONENTS | Safety Technology - FALL SAFE INSPECTOR® |
| WEIGHT PER SIZE EAN/UPC PER SIZE | FS240-S/M - 2,30kg - 5605423570687 FS240-XXL - 2,70kg - 5605423571226 FS240-L/XL - 2,50kg - 5605423571219 |



FS240

FLASH HARNESS


O FLASH é um arnês multifunções, podendo ser utilizado numa vasta variedade de áreas de trabalho, desde o acesso por cordas, ao resgate, construção, turbinas eólicas até riggers ou postes de madeira. Este equipamento tem um d-ring de alumínio nas costas (A - EN361) e dois loops frontais (1/2 A + 1/2 A - EN361). Tem duas argolas para posicionamento no cinto (EN358) e dois loops frontais na zona do ventre para acesso por cordas (EN813). Este arnês tem 8 pontos de ajuste para uma adaptação perfeita e a localização das fivelas permite que seja aberto na totalidade e vestido facilmente como um casaco. O arnês está identificado com tag RFID, etiqueta S/N e código QR para fácil rastreabilidade e controlo.



Informação Técnica

| | |
|--------------------|---|
| TEMPO DE VIDA ÚTIL | 10 |
| CARGA MÁXIMA | CE - 140kg |
| INSPEÇÃO | Yearly |
| RASTREABILIDADE | S/N RFID QR Code |
| NORMAS | CE - EN361:2002 CE - EN358:2018 CE - EN813:2024 |
| INTRASTAT | 63079098 |

Imagens do Produto

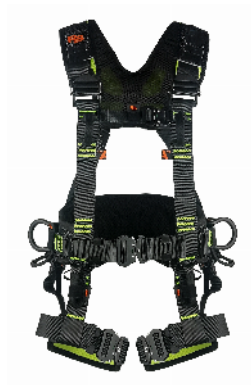

ESPECIFICAÇÕES

| | |
|---|---|
| COMPONENTES METÁLICOS | Alumínio, aço |
| COMPONENTES TÊXTEIS | Poliéster |
| OUTROS MATERIAIS | PA6, silicone |
| TIPO DE FITA | PES 45mm repelente à água |
| D-RINGS | ALU D-ring dorsal e lateral, loops frontais |
| PONTOS DE ANCORAGEM (A) | 4 |
| PADDING OMBROS | Sim - Croc Smooth Padding 3.0 |
| PADDING LOMBAR | Sim - Croc Smooth Padding 3.0 |
| PADDING PERNA | Sim |
| MATERIAL DO PADDING | TPU, EVA, PA, malha e tecido alta-visibilidade PES |
| PONTO LIGAÇÃO DE CADEIRA | Não |
| SUPORTE DE FERRAMENTAS | 5 |
| CAPACIDADE MÁX. DO SUPORTE DE FERRAMENTAS | 15kg |
| PONTOS DE AJUSTE | 8 |
| FIVELAS | 4 ALU fivelas IZY quick connect; 2 ALU spring fivelas; 2 ST fivelas de barras |
| INDICADORES DE QUEDA | Sim |
| SUPORTE DE LONGES | Sim |
| COMPONENTES | Tecnologia de Segurança - FALL SAFE INSPECTOR® |
| WEIGHT PER SIZE EAN/UPC PER SIZE | FS240-S/M - 2,30kg - 5605423570687 FS240-XXL - 2,70kg - 5605423571226 FS240-L/XL - 2,50kg - 5605423571219 |